



British Sub Bass Panel 300 & 500 Watt Instructions

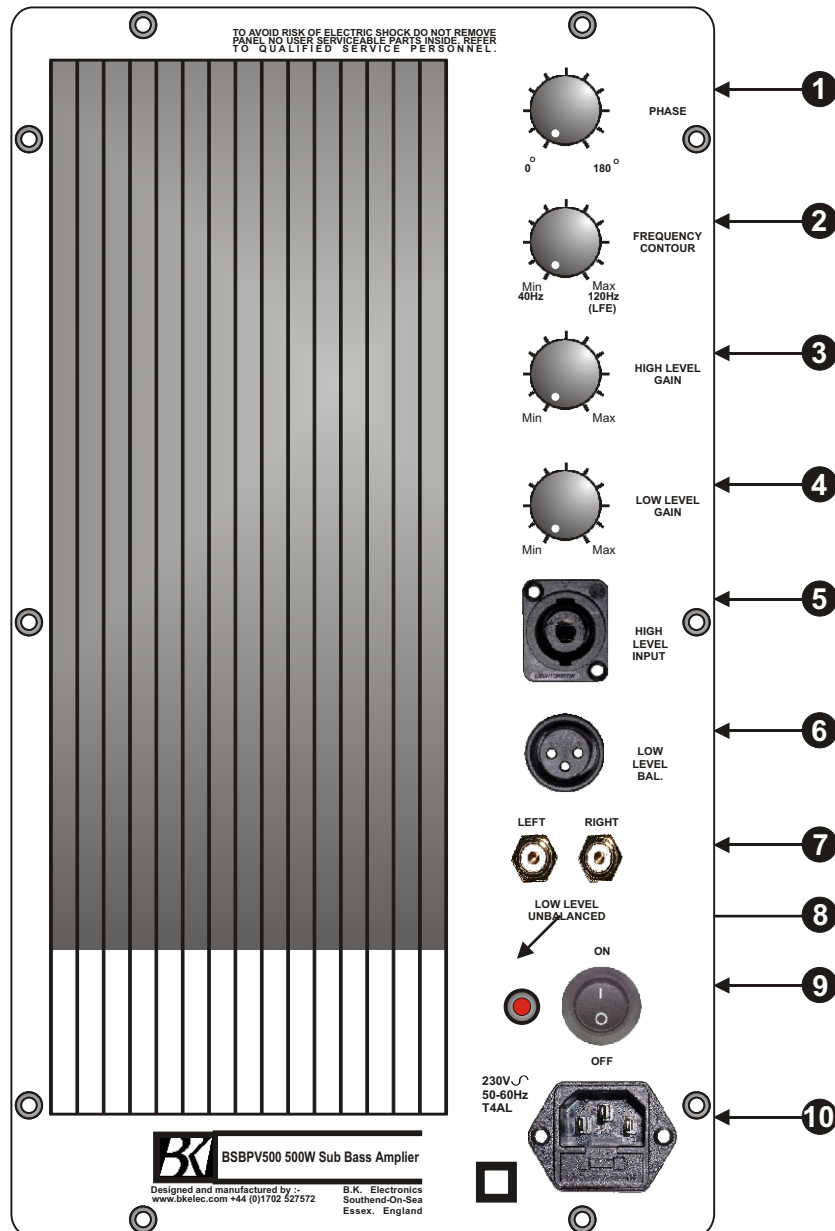

- 1) Continuously variable phase control
- 2) Frequency Contour, set up so as to integrate with main loudspeakers. In the L.F.E. Position the filter is opened wide to allow the optimum performance from processor built in bass filtering.
- 3) High Level Gain Adjust
- 4) Low Level Gain Adjust
- 5) High Level Input connector for connection to amplifier output
- 6) Low Level Balanced input XLR
- 7) Low Level Input RCA connectors for connection to pre-amp output, Dolby output or other dedicated sub outputs
- 8) LED indicator green = on / red = protect please note that this will stay red for 5 seconds after switch on.
- 9) Power Off/On Switch
- 10) IEC mains input connector. (Fuse Drawer contains spare 4AT fuse)

Wiring Instructions


High Level

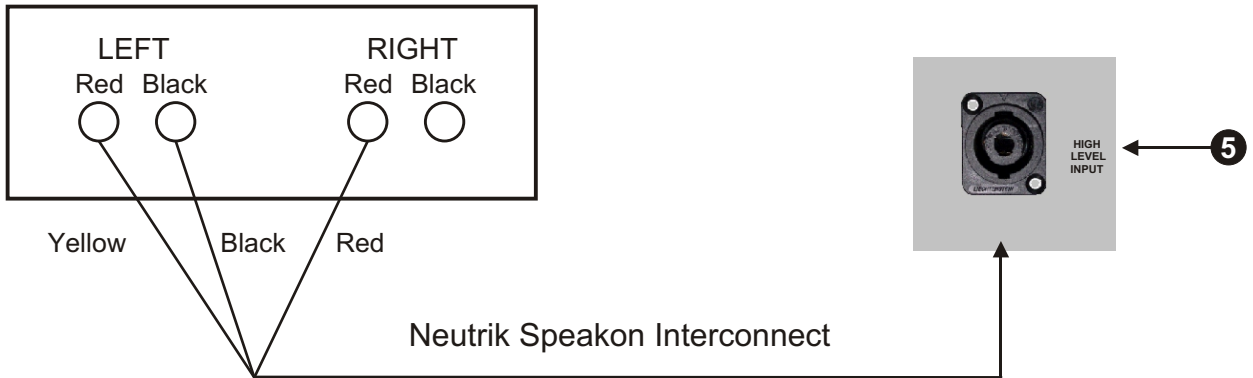


Low Level Balanced



Low Level Unbalanced





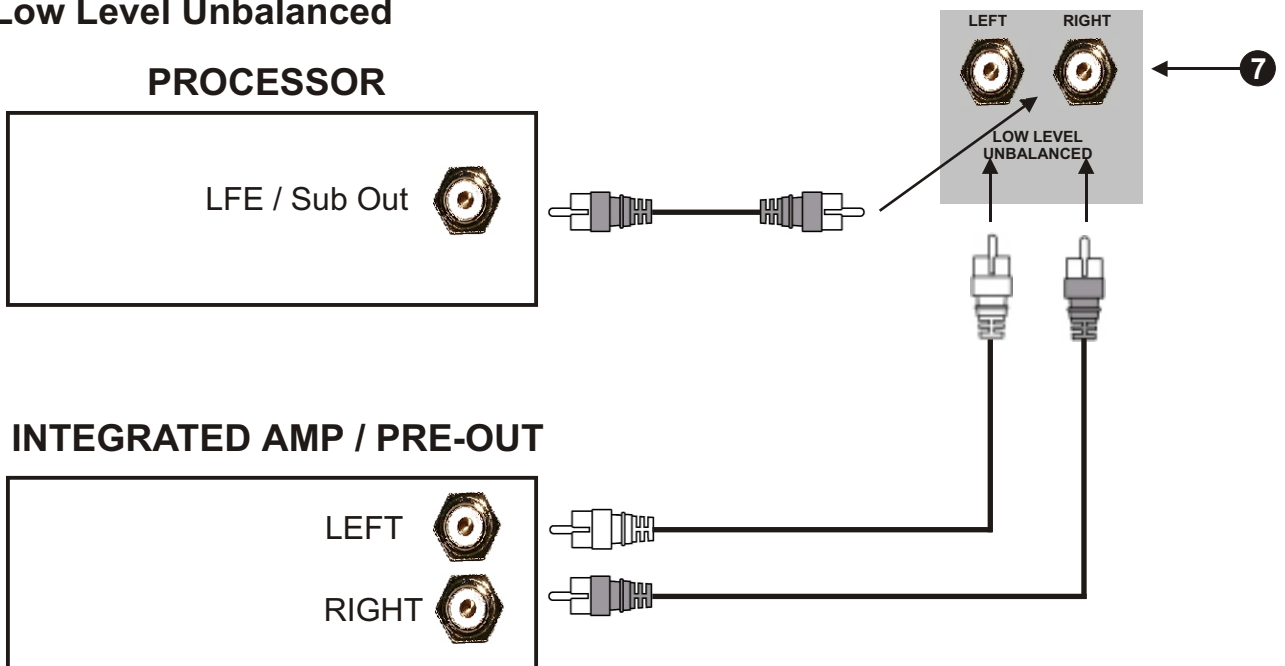


Wiring Instructions + Eq Switching

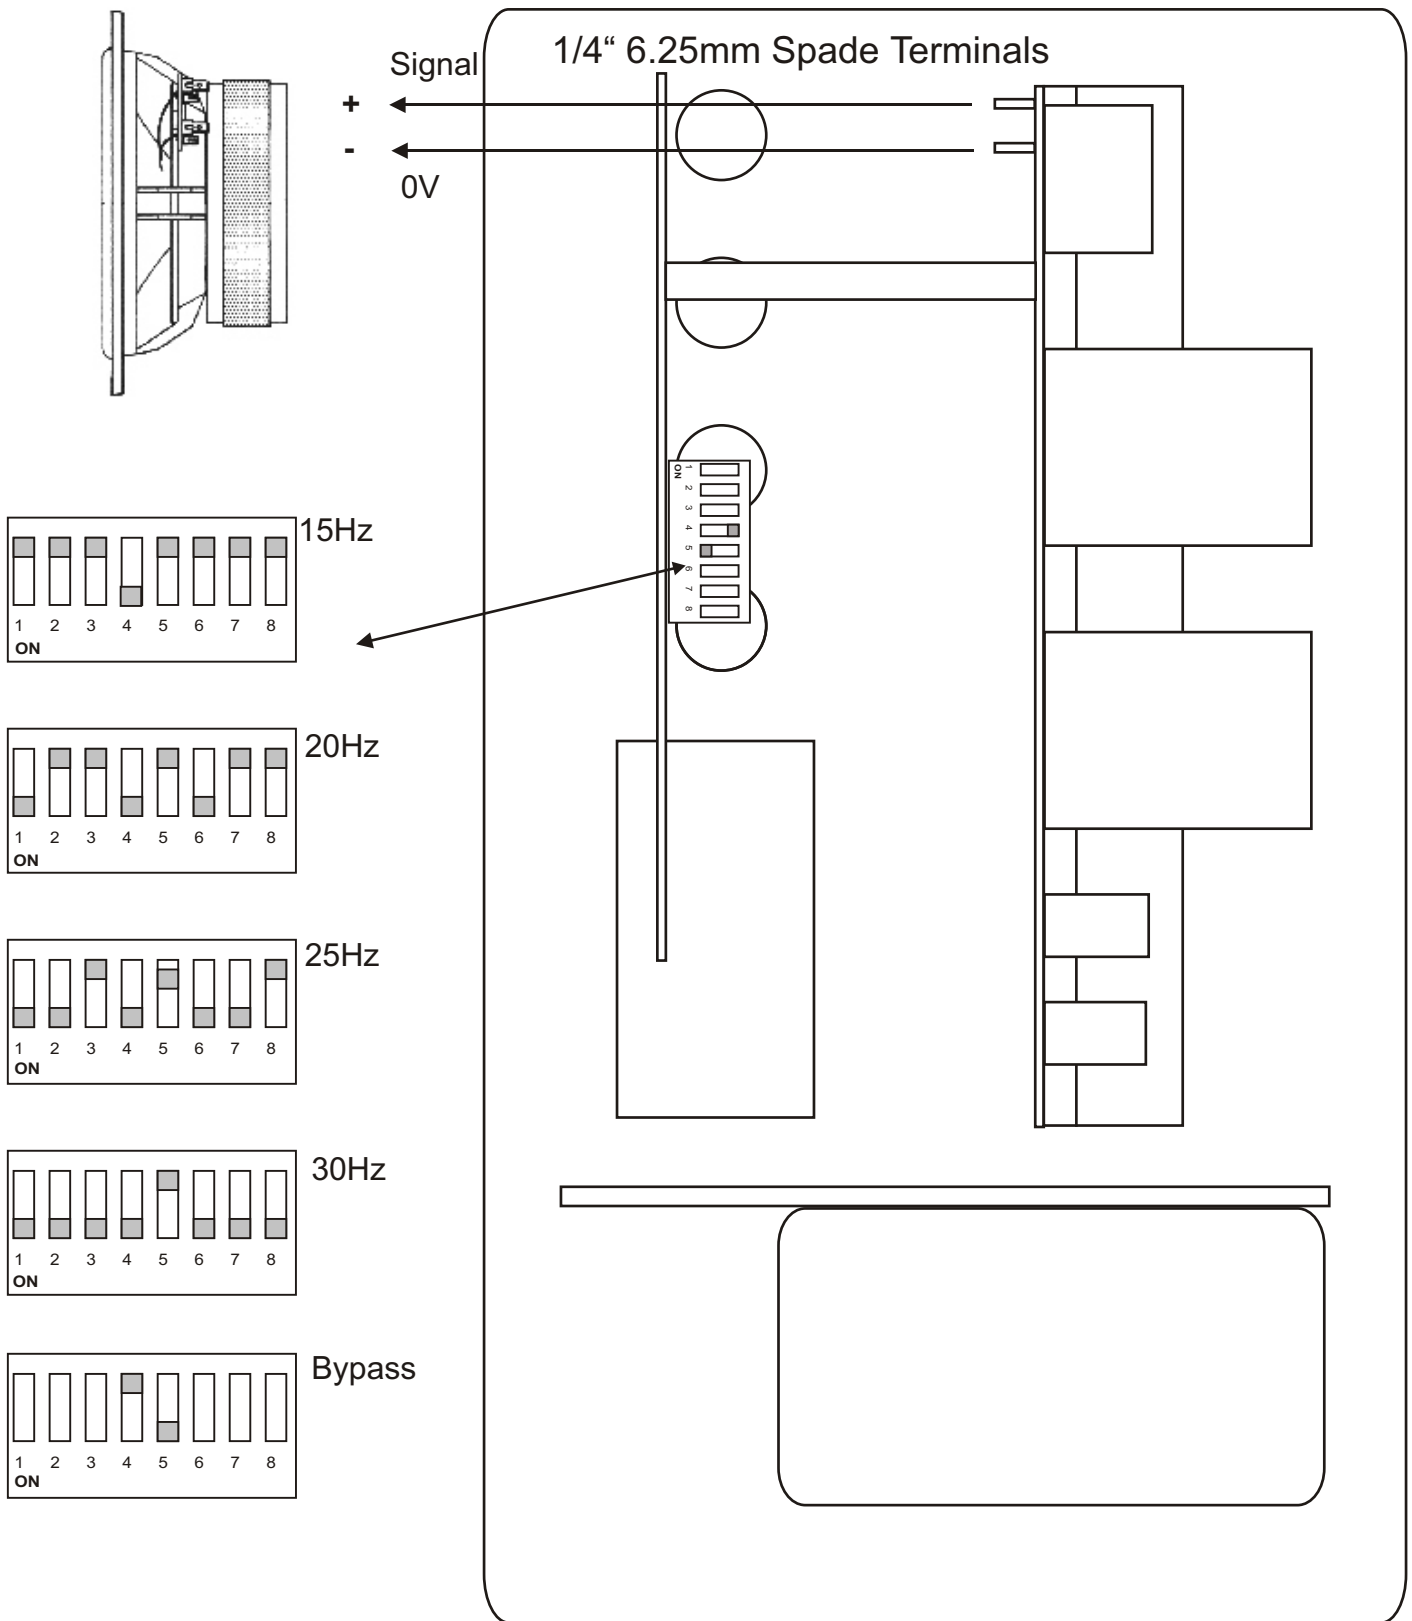

This amplifier panel is optimized for use with an **4 Ohms** loudspeaker. Operation into loads lower than **4 Ohms** will substantially reduce the lifetime of the panel

Eq Plots

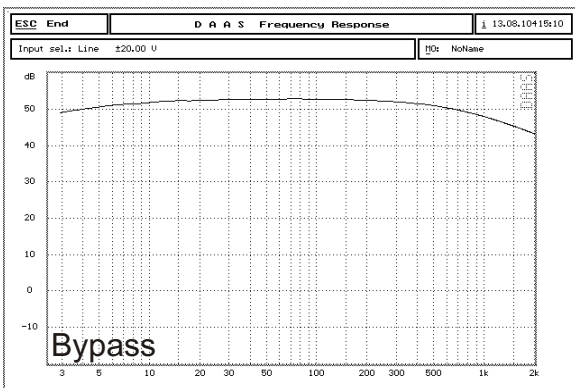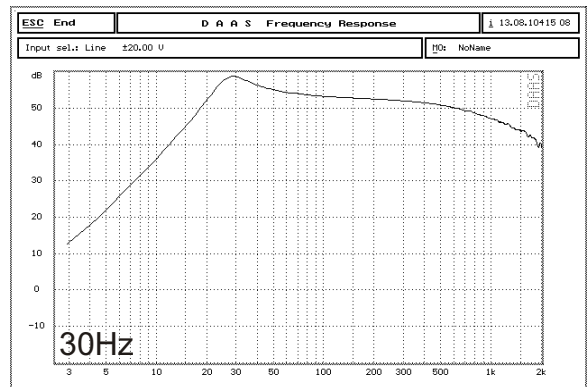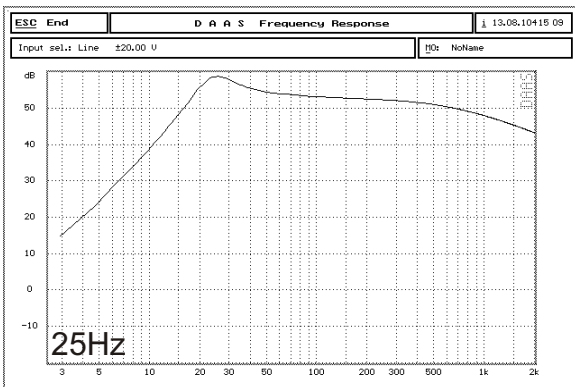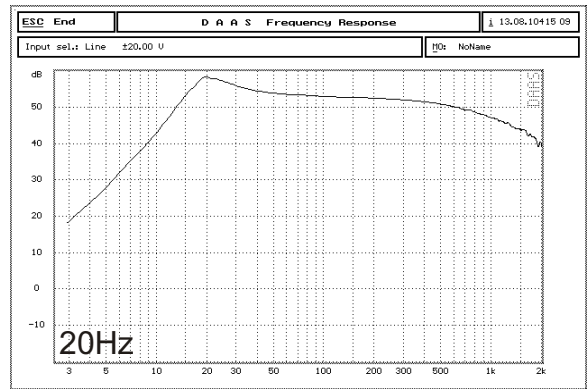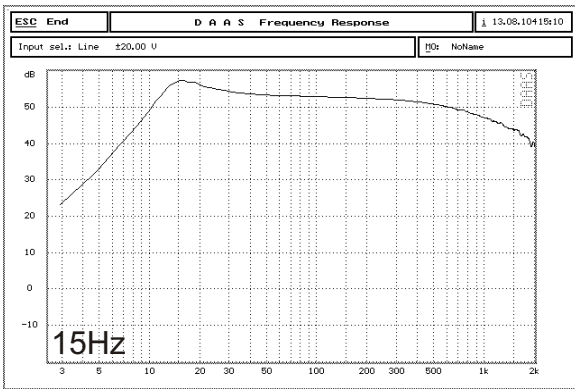

For bypass switch 4 must be set to the OFF position and Switch 5 to the ON position when in bypass mode switches 1,2,3,6,7 and 8 have no effect